


## SDX-1226-2

Precision current to voltage amplifier, for use with TRAP detectors.

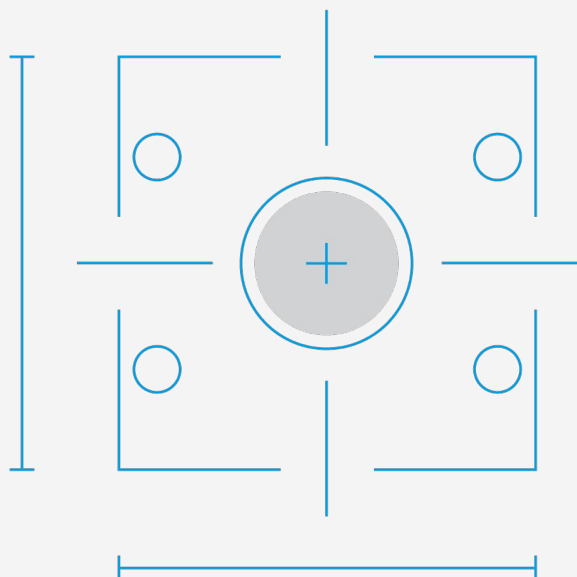

### 产品系列主要特性

#### HIGH PRECISION CURRENT TO VOLTAGE AMPLIFIER

These amplifiers include a microprocessor for remoted set up and control. They use thermally stable, precision resistors to provide highly accurate conversion of current to voltage.

#### MANUAL OR REMOTE CONTROL

They provide six gain ranges from 10 KΩ to 1 GΩ. These ranges can be selected manually or by remote control using the USB interface and our software. They can also be selected manually using the rotary switch.

#### POWER SUPPLY OPTIONS

- SDX-1153 preamp is power over the USB 2.0 and requires +5V at 500 mA.
- SDX-1226-1 and -2 require use of an external DC power supply.

## 规格

### 控制器和图形用户界面 (GUI) 规格

模拟输出	BNC, ± 10 V
外部触发	无
串行命令方式	USB
外部电源	External DC power jack

### 功率计规格

功率范围	± 10 μA
数字分辨率	19 pA
监控器准确度	0.01%

### 能量计规格

### 订购信息

SDX-1226-2

规格如有更改, 恕不另行通知。有关完整规格, 请参阅用户手册。

对这个产品感兴趣吗?

获得报价

通过 [gentec-eo.cn/contact-us](http://gentec-eo.cn/contact-us) 找到您的本地销售代表