


UP52M-300W-QED-DO

Thermal detector for laser power measurement up to 300 W.

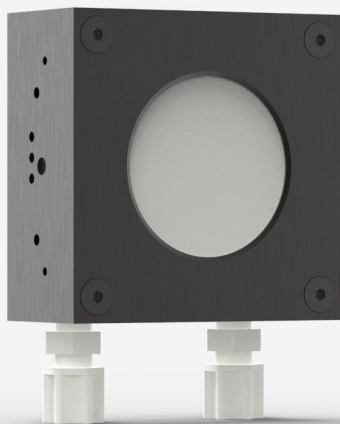

KEY FEATURES

MODULAR CONCEPT

Increase the power capability of your detector: 4 different cooling modules

HIGH PEAK POWER DIFFUSING ABSORBER

Perfect for pulsed beams with high energy density

COMPACT DESIGN

40 mm thick

HIGH AVERAGE POWER

Measure up to 300 W of continuous power

SMART INTERFACE

Containing all the calibration data

COMPATIBLE STAND

[STAND-S-443](#)

SPECIFICATIONS

MEASUREMENT CAPABILITIES

Maximum average power (continuous) ¹	300 W
Maximum average power (1 minute) ²	300 W
Noise equivalent power ³	15 mW
Spectral range ⁴	0.3 - 2.5 μm
Typical rise time ⁵	4 sec
Typical power sensitivity ⁶	0.06 mV/W
Power calibration uncertainty ⁷	$\pm 2.5\%$
Repeatability	$\pm 0.5\%$

1. Minimum cooling flow 1 liters/min, water temperature $\leq 22^\circ\text{C}$, 1/8 NPT compression fittings for 1/4 inch semi-rigid tube. Contact Gentec-EO for clean deionized water cooling module option.

2. Minimum cooling flow 1 liters/min, water temperature $\leq 22^\circ\text{C}$, 1/8 NPT compression fittings for 1/4 inch semi-rigid tube. Contact Gentec-EO for clean deionized water cooling module option.

3. Nominal value, actual value depends on electrical noise in the measurement system.

4. This spectral range refers to the calibration traceability.

5. With anticipation.

6. Into 100 k Ω load. Maximum output voltage = sensitivity x maximum power.

7. Including linearity with power.

MEASUREMENT CAPABILITIES (ENERGY MODE)

Maximum measurable energy ¹	1000 J
Noise equivalent energy ²	0.25 J
Minimum repetition period	9 s
Maximum pulse width	371 ms
Energy calibration uncertainty ³	$\pm 5\%$

1. For 360 μs pulses. Higher pulse energy possible for long pulses (ms), less for short pulses (ns).

2. Nominal value, actual value depends on electrical noise in the measurement system.

3. When single-shot energy calibration is purchased

DAMAGE THRESHOLDS

Maximum average power density ¹	100 kW/cm ²
Maximum energy density ²	8 J/cm ²

1. At 1064 nm, 10 W CW. May vary with wavelength and average power.
2. At 1064 nm, 7 ns, 10 Hz. May vary with wavelength and pulse width.

PHYSICAL CHARACTERISTICS

Aperture diameter	52 mm
Absorber	QED
Dimensions	89H x 89W x 40D mm
Weight	0.84 kg

ORDERING INFORMATION

UP52M-300W-QED-D0	203878
UP52M-300W-QED-IDR-D0	205205
UP52M-300W-QED-INT-D0	205198
UP52M-300W-QED-BLU-D0	TBD

INTERESTED IN THIS PRODUCT?

GET A QUOTE

Find your local sales representative at gentec-eo.com/contact-us