


FITTINGS OPTIONS:  
 1- Stainless Steel VCO FITTING 1/2in. O-ring face seal fitting. (ACTUAL)  
 2- Push to connect tube fitting, straight adapter, for 1/2" tube OD  
 3- Stainless Steel Full Flow Quick Connect Stem without Valve, 11.5 Cv

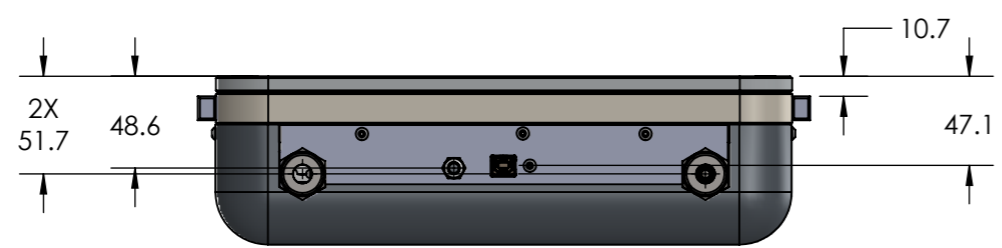


NOTES:  
 1- DIMENSION IN mm.  
 2- CENTER OF GRAVITY IS IN THE CENTER (FACE VIEW). *ST* 2020/11/26 *ML*

**IMPORTANT:**  
 THIS DOCUMENT IS PROPERTY OF GENTEC ELECTRO-OPTICS, IT CANNOT BE DISTRIBUTED, USED OR REPRODUCED IN WHOLE OR IN PART WITHOUT EXPRESS WRITTEN AUTHORIZATION

A	MINOR CHANGES ADDED	2020/11/26	ST	<i>RLP</i>
REF.	REVISION	DATE	VER	APP



APP. \_\_\_\_\_  
 VER. \_\_\_\_\_  
 S. BOUCHARD  
 DATE 2019/07/24  
 LAYOUT DRAWING  
 IMPERIAL FITTINGS  
 HP280-30KW-HD-D0



DATE 2019/07/24  
 1:4  
 SK-10001  
 A3