


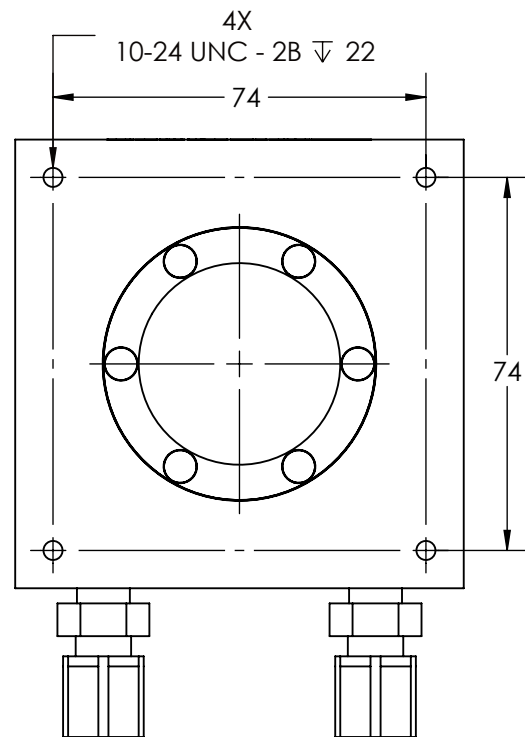
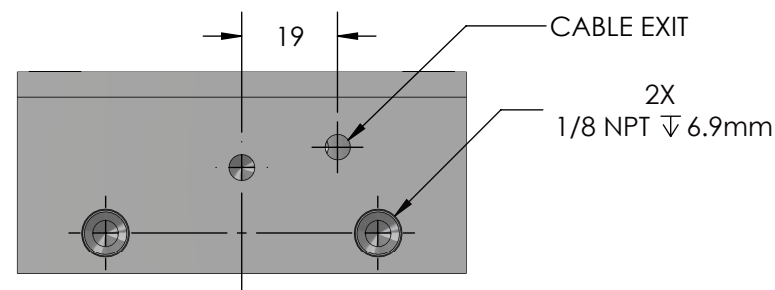
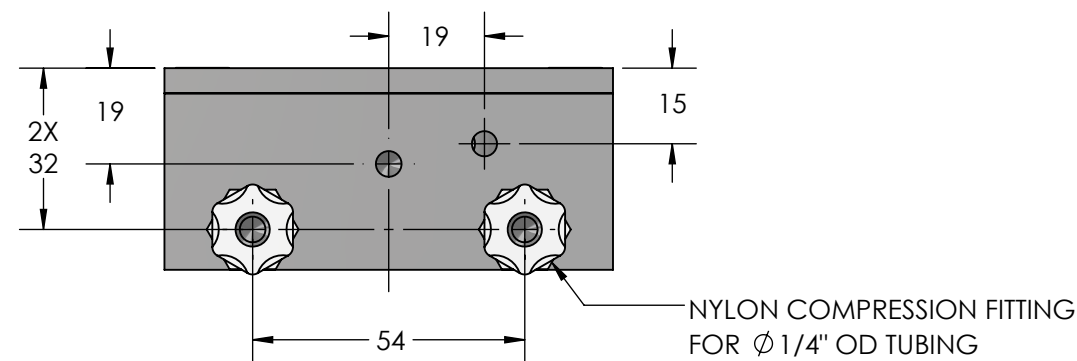


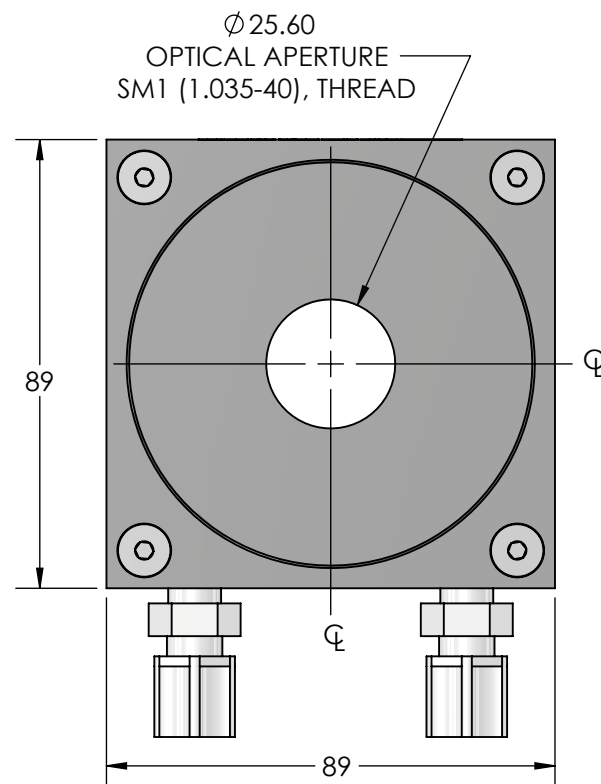

MOUNTING FROM FRONT WITHOUT COVER
SEE NOTE 2

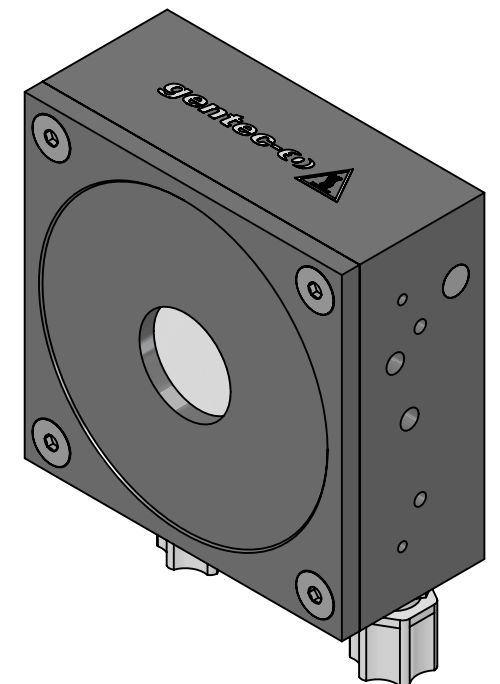

BOTTOM VIEW
FITTINGS REMOVED

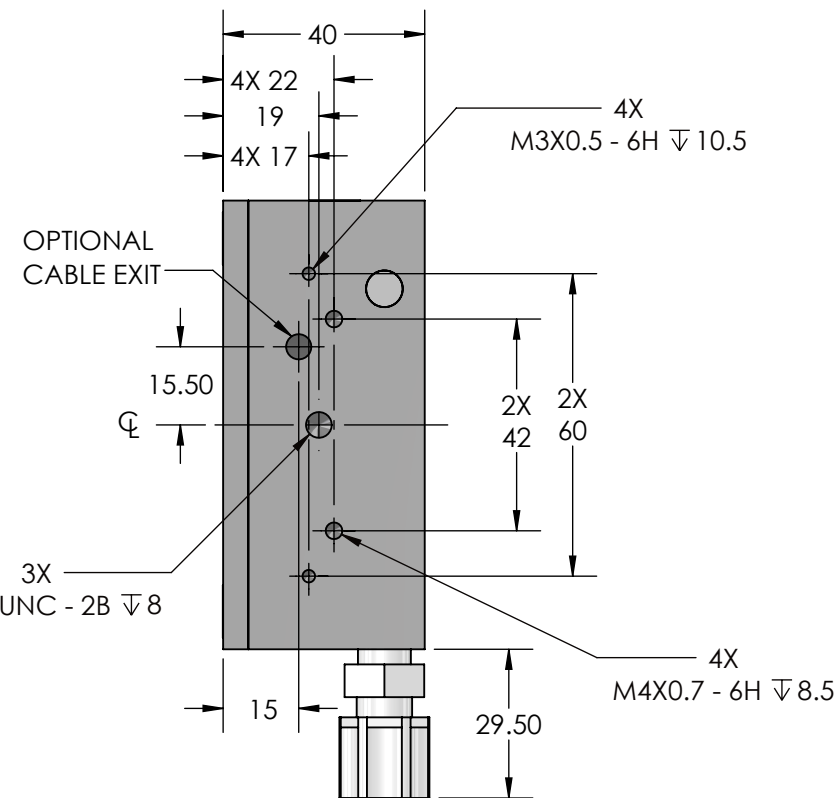

NOTES:
1- DIMENSIONS IN mm
2- FOR MOUNTING FROM THE FRONT WITHOUT A FRONT COVER
THE WATTMETER MUST BE FASTENED FROM THE FRONT; USE FOUR
10-24 UNC - 2B FASTENERS.

C	4810	2026-05-20			
B	4515	2025-11-26			
A	4706	2024-08-21			
-	INITIAL RELEASE	2006-10-22			
REF.	REVISION / DCI	DATE			

gentec-e

IMPORTANT:
THIS DOCUMENT IS PROPERTY OF GENTEC
ELECTRO-OPTICS, IT CANNOT BE DISTRIBUTED,
USED OR REPRODUCED IN WHOLE OR IN PART
WITHOUT EXPRESS WRITTEN AUTHORIZATION.

TOLERANCE DEC. ± 0.10 mm ANGLE ± 0.5° Ra 1.6 µm	S. BOUCHARD MOD. ST VER. JB 2026-05-21 APP. J.P. 2026-05-26 APP. G 2026-05-27	LAYOUT DRAWING UP25M SERIE UP
PROJECTION 2:3		SK-9101C