


## PH100-SiUV-OD.3-D0

Photodiode detector for laser power measurement up to 16 mW.

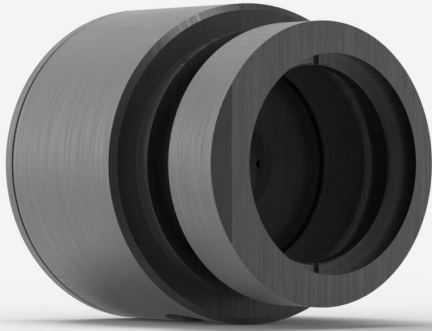

### PRODUCT FAMILY KEY FEATURES

#### LARGE APERTURES

10 mm Ø for the silicon sensors

#### 3 VERSIONS

- Silicon 350 - 1080 nm, up to 750 mW
- Silicon-UV 210 - 1080 nm, up to 38 mW
- Germanium 800 - 1650 nm, up to 500 mW

#### CHOICE OF ATTENUATORS

Models with attenuators include a calibration both with and without the removable filter

#### HIGH ACCURACY

The new PH100-SI-HA presents the lowest calibration uncertainty to date.

#### PRECISE CALIBRATION

Wavelength selection in 1 nm steps

#### SMART INTERFACE

Containing all the calibration data

#### COMPATIBLE STAND

[STAND-D-233](#)

## SPECIFICATIONS

### MEASUREMENT CAPABILITIES

Maximum average power <sup>1</sup>	16 mW
Noise equivalent power <sup>2</sup>	20 pW
Spectral range	210 - 1080 nm
Typical rise time	0.2 s
Power calibration uncertainty <sup>3</sup>	±18 % (210 - 229 nm) ±8.0 % (230 - 254 nm) ±6.5 % (255 - 399 nm) ±5.0 % (400 - 1009 nm) ±7.5 % (1010 - 1080 nm)
Peak sensitivity	850 nm
Minimum repetition rate <sup>4</sup>	155 kHz

1. At 300 nm, with attenuator. See curves for maximum power at other wavelengths.

2. At 850 nm. Nominal value. Actual value depends on environmental electromagnetic interference and wavelength.

3. With attenuator. See user manual for calibration uncertainty without attenuator.

4. See user manual for details.

### DAMAGE THRESHOLDS

Maximum average power density	100 W/cm <sup>2</sup>
-------------------------------	-----------------------

### PHYSICAL CHARACTERISTICS

Aperture diameter	10 mm
Absorber	SiUV
Dimensions	38.10 x 46.3D mm
Weight	0.14 kg
Distance to sensor face	13.7 mm

### ORDERING INFORMATION

PH100-SiUV-OD.3-D0	202679
--------------------	--------

Specifications are subject to change without notice. Refer to the user manual for complete specifications.

## INTERESTED IN THIS PRODUCT?

GET A QUOTE

Find your local sales representative at [gentec-eo.com/contact-us](http://gentec-eo.com/contact-us)